



ADDO L95

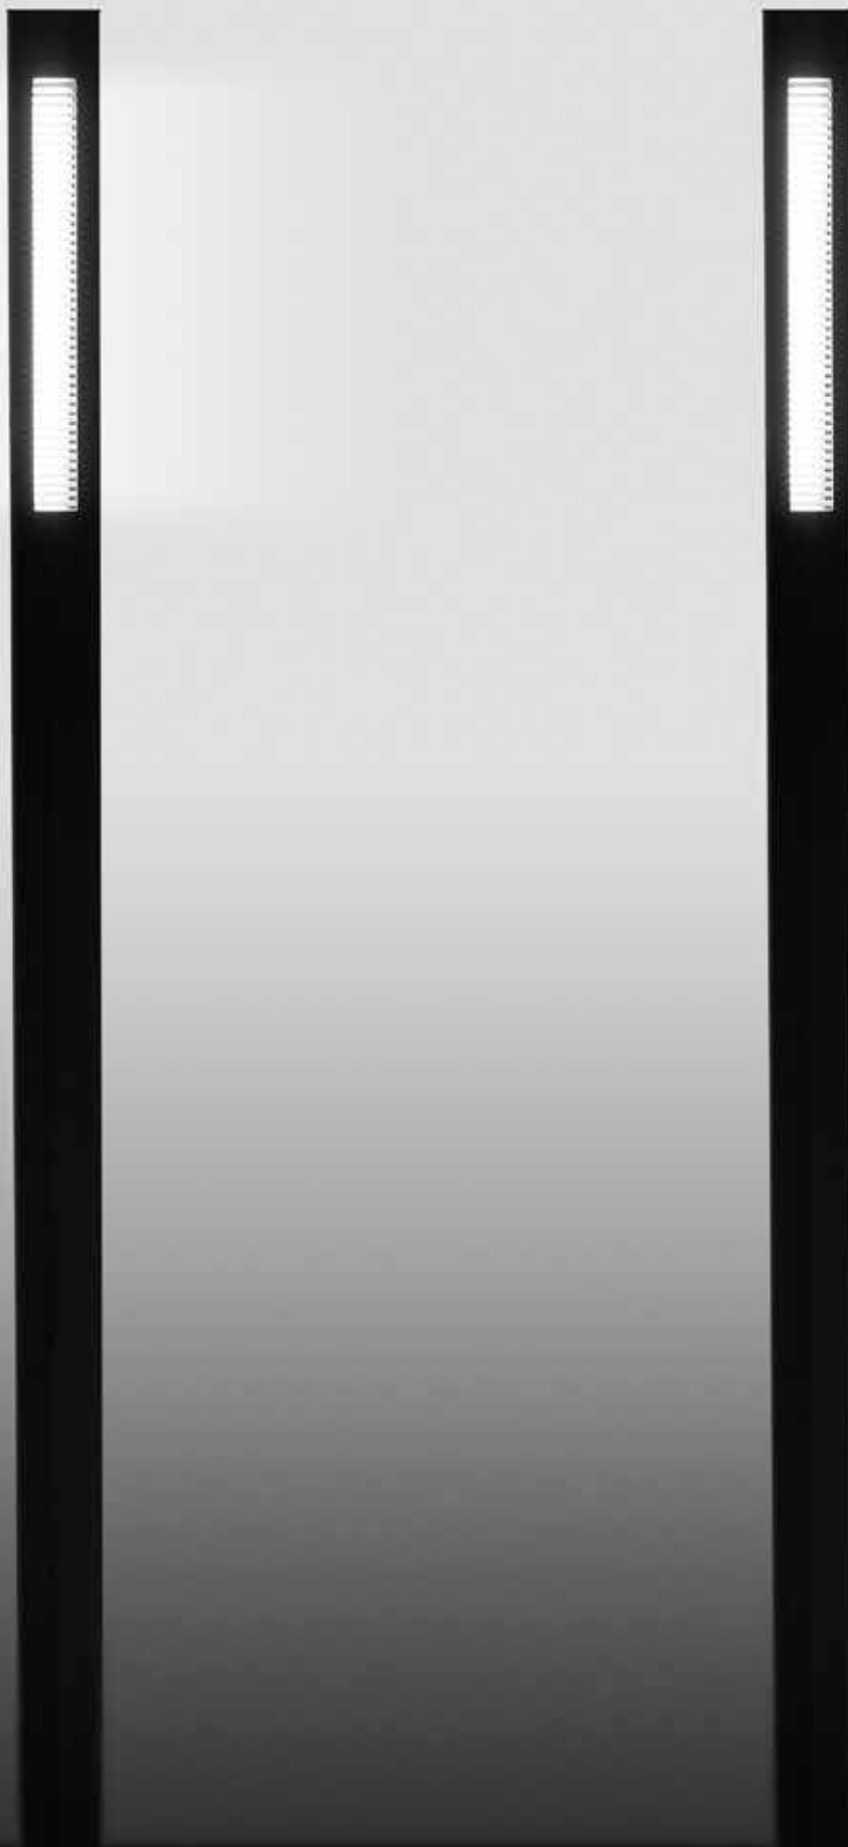

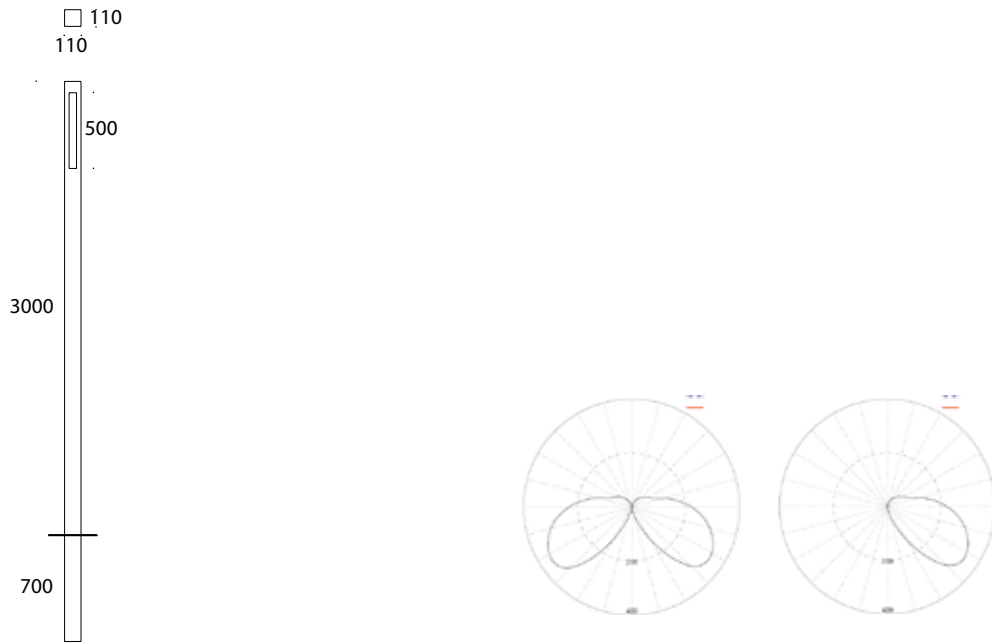

## ADDO L95 - PARK

**Design: Friis & Moltke design A/S**

Light distribution	Direct distribution of light with 1 or 2 sided light output
Materials	Hot galvanized steel or powder coated hot galvanized steel Top in powder coated aluminium
Optics/Reflector	Clear shockproof acrylic lamp cover, UV-resistant White aluminium grid
Height	3000 mm
Light source	LED 12W/830/1403Lm. 50Khrs. 1-sided light LED 22W/830/2806Lm. 50Khrs. 2-sided light
Installation	For casting or flange mounting. Earth spike or flange is included
Connection	3 cables max. 5x10 mm <sup>2</sup> , 2 cables max. 5x16 mm <sup>2</sup> Connection box and fuse are included
CE	
Classification	IP54. IK10. Insulation safety class II
Weight	30 kg.