


ADDO L96



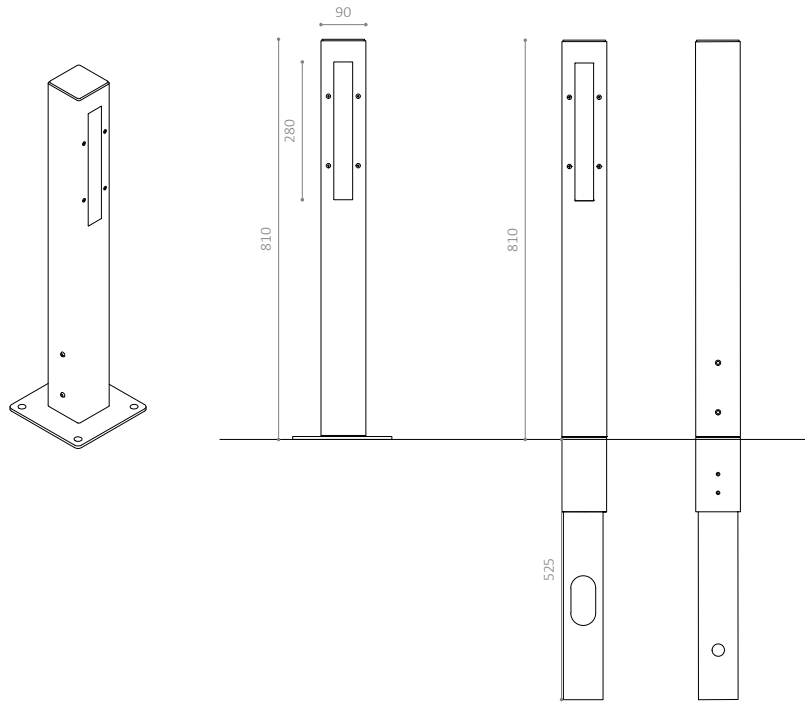

ADDO L96 - BOLLARD LIGHT

DESIGN: FRIIS & MOLTKE DESIGN

LIGHT DISTRIBUTION

Direct light distribution. Diffuser for downward light. 1 or 2 light openings

MATERIALS

Lamp housing: Hot-dip galvanised steel or powder coated, hot-dip galvanised steel

Shade: Clear acrylic. UV-resistant

DIMENSIONS

Height: 810 mm
 Post: 90 x 90 mm
 Weight: 15,9 / 16,5 kg

LUMINOUS FLUX

Luminous efficacy: 37,1 Lm/W (L96-1),
 40,6 Lm/W (L96-2)
 Lumen, 80 Ra:
 3000K:
 258Lm (L96-1), 539Lm (L96-2),
 4000K:
 284Lm (L96-1), 594Lm (L96-2)

LIGHT SOURCE

LED type: Philips Fortimo LEDstrip
 Operational life: >70.000 hours at Ta 25° C. L80B10
 Total consumption: 7W (L96-1), 14W (L96-2)
 Colour temperature: 3000K, 4000K
 Colour rendering: CRI >80 (Std.), CRI >90 (Opt.)
 Colour accuracy: 3 steps SDCM

DRIVER

Driver type: Philips Xitanium
 Operational life: >50.000 hours
 Surge protection: >2 kV
 Control: No. Compatible with DALI, Casambi as optional extra

INSTALLATION

Embedding or flange mounting

CONNECTION

2 cables max 5 x 4 mm². Connection box and fuse are included

CLASSIFICATION

IP56, IK10, Insulation safety class II