



KONUS

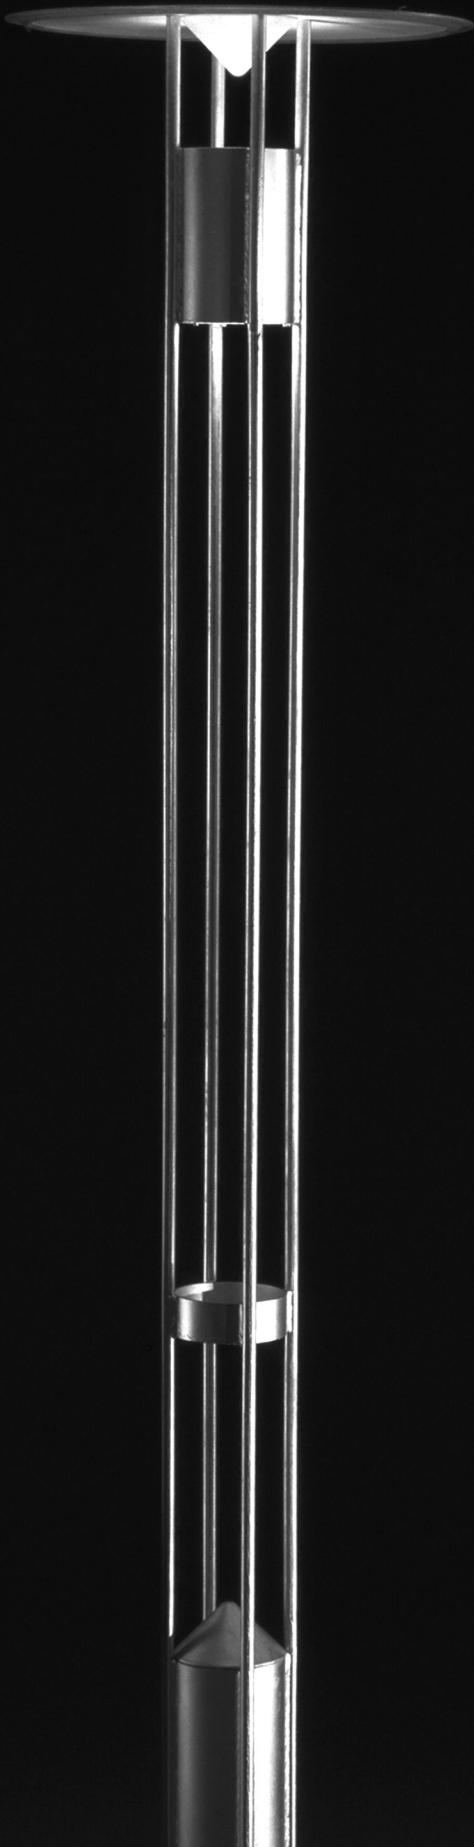

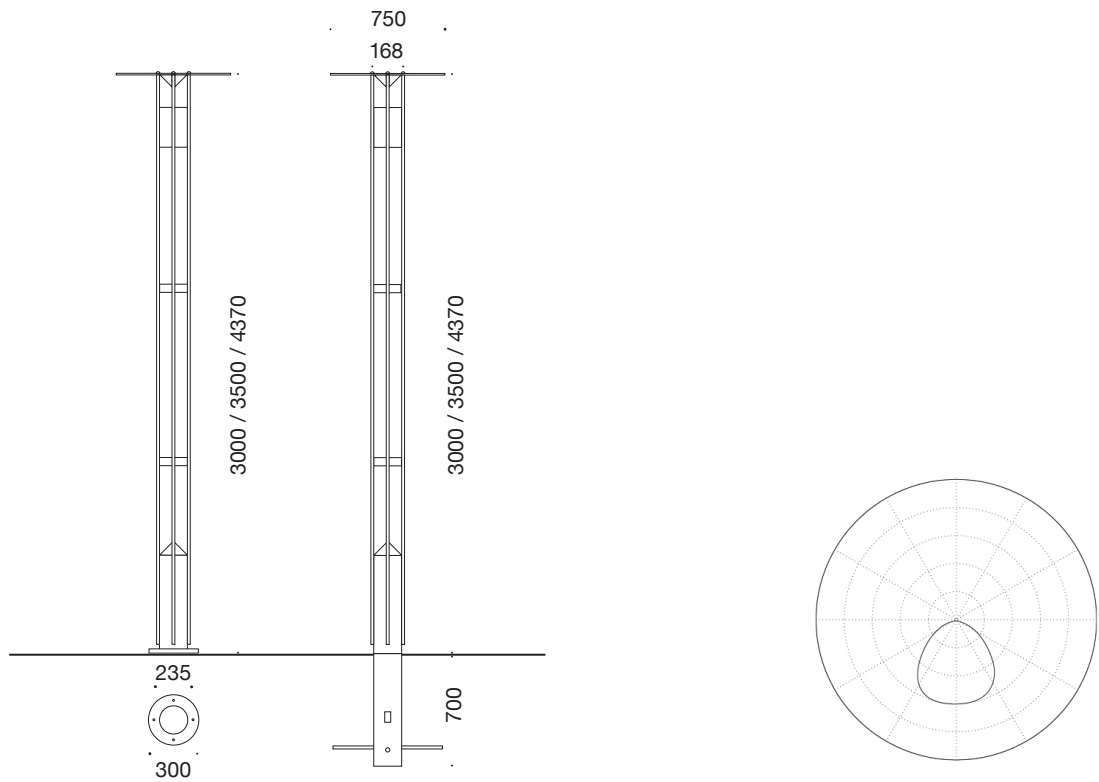

KONUS - PARK

Design: Torben Rix / Ole Bruhn

Light distribution	Direct and rotationally symmetrical distribution of light
Materials	Pole in hot galvanized steel or powder coated hot galvanized steel
Optics	Clear shockproof polycarbonate lamp cover
Height	3000 mm / 3500 mm / 4370 mm
Light source	E27 retrofit LED Light source is not included and must be ordered separately
Installation	For casting or flange mounting. Earth spike or flange is included
Connection:	3 cables max. 5x10 mm ² , 2 cables max. 5x16 mm ² . Connection box and fuse are included
CE	
Classification	IP44. IK10. Insulation safety class II
Weight	38 / 56 / 59 kg